




- Connect the camera to an AHD DVR or a portable monitor with the 12VDC or 24VAC power source using the supplied DC Power Pigtail Cable or a power adapter.

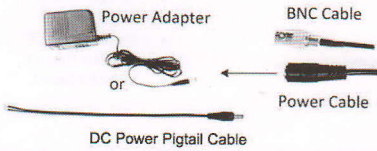

- Loosen the screws on the bottom of housing, then pull out the OSD panel to configure camera settings using the OSD Menu Joystick, connect one end of the Test Lead to the Test-out connector on the camera module and the other end to the portable monitor.



OSD indication as shown in the figure:




- Push the Joystick up / down to select among menu items.
- Push the Joystick left / right to adjust the level of the selected item.
- Press the Joystick to enter the submenu or exit the OSD Setup Menu.


Note: The function button is not only for direction control, also for switching Video format and Video output. Please follow the detailed instruction as below:

- Push the joystick "down" button key over 5 seconds to switch video format from PAL to NTSC.
- Push the joystick "left" button key over 5 seconds to switch video output from 720p to 960H (720p is the default).
- Push the joystick "right" button key over 5s to switch video output from 960H to 720p.

- Enter the OSD setup menu and adjust the focus & zoom nuts inside the housing by using the supplied Screw Driver.



- Tear apart the outer packing (figure 1) to take out the Desiccant Bag (figure 2), and put it into the camera housing (figure 3).

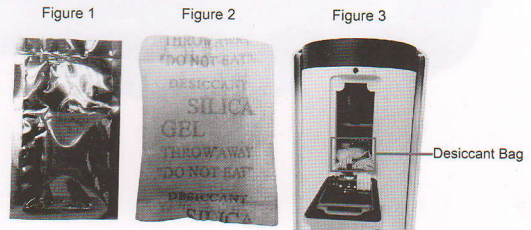

Note: It's recommended to close the OSD panel immediately in case of reducing the absorption capacity of the desiccant bag inside the camera.

- Screw back the OSD panel using the supplied Hexagon Wrench.

EverFocus Electronics Corp.

EverFocus Taiwan:
12F-1, No.79, Sec. 1, Shin-Tai Wu Road,
Hsi-Chih, New Taipei City, Taiwan
TEL: +886 2 2698 2334
FAX: +886 2 2698 3943
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus China - Beijing:
Room 609, Technology Trade Building,
Shangdi Information Industry Base,
Haidian District, Beijing 100085, China
TEL: +86 10 6297 3336~39
FAX: +86 10 6297 1423
www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - California:
1801 Highland Avenue, Unit A, Duarte, CA 91010,
USA
TEL: +1 626 844 8888
FAX: +1 626 844 8838
www.everfocus.com
sales@everfocus.com

EverFocus Japan:
3F Kuramochi, Buildingll 2-2-3 Koto-Bashi,
Sumida-Ku Tokyo, 130-0022, Japan
TEL: +81 3 5625 8188
FAX: +81 3 5625 8189
www.everfocus.co.jp
info@everfocus.jp

EverFocus India:
UBS, 629/1243, 1st Floor, G Block, Behind
Teacher's Colony, Bandra Kurla Complex,
Bandra (E), Mumbai 400 051, India
TEL: +91 22 6726 4500
FAX: +91 22 6726 4518
www.everfocus.in
sales@everfocus.in

EverFocus Europe - Germany:
Albert-Einstein-Strasse 1, D-46446
Emmerich, Germany
TEL: +49 2822 93940
FAX: +49 2822 939495
www.everfocus.de
sales@everfocus.de

EverFocus China - Shenzhen:
4F, No. 2, D4 Building, Wan Yelong
Industrial Park, Tangtou Road, Shiyuan,
Baoan, Shenzhen, Guangdong 518101, China
TEL: +86 755 2765 1313
FAX: +86 755 2765 0337
www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - New York:
415 Oser Avenue, Unit S, Hauppauge, NY 11788, USA
TEL: +1 631 436 5070
FAX: +1 631 436 5027
www.everfocus.com
sales@everfocus.com

EverFocus China - Shanghai:
Room 403, Ruijin Business Center, No.96, Zhaojiabang
Road, Luwan district, Shanghai 200020, China
TEL: +86 21 6471 2229 / 6471 2291
FAX: +86 21 6471 0566
www.everfocus.com.cn
marketing@everfocus.com.cn



EZ930/950 eZ.HD Series

720p Analog High Definition

True Day/Night Outdoor IR Bullet Camera

Quick Installation Guide




Copyright © EverFocus Electronics Corp,
Release Date: Nov., 2014

1.1 Packing List

- Camera Body x 1
- User Manual x 1
- Test Lead x 1
- DC Power Pigtail Cable x 1
- Screw x 3
- Quick Installation Guide x 1
- Hexagon Wrench x 1
- Screw Driver x 1
- Plastic Anchor x 3
- Template Plate x 1
- Desiccant Bag x 1


1.2 Cable Description

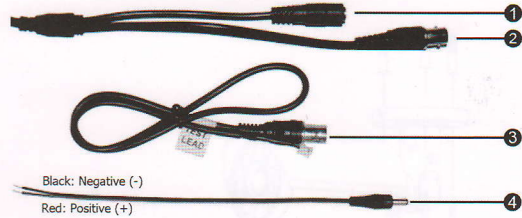


Black: Negative (-)
Red: Positive (+)

No.	Name	Descriptions
1	Power Cable	Connect to a 12VDC or 24VAC power source.
2	Dual Video Output	720p and 960H output, using a 75 Ohm BNC-type coaxial cable.
3	Test Lead	Connect to a monitor for setting image aim and focus.
4	DC Power Pigtail Cable	Optional power pigtail cable. The red wire is positive (+); while the black wire is negative (-).

1.3 Installation and Adjustment




Overview for EZ930




Overview for EZ950


1. For Ceiling Mount / Wall Mount users: Stick the **Template Plate** on the position where you want to attach the camera.



2. Drill three holes and insert the supplied **Plastic Anchors** into the holes, then attach the camera to the ceiling or wall by using the supplied **Screws**.



3. Loosen the screw on the bracket with **Hexagon Wrench**, and adjust camera angles by tilting or rotating the camera. Then fasten the bracket with the **Hexagon Wrench** (Note: The bracket base can be rotated by 360°, the housing body also can be rotated by 360° and tilted by 90°).



Precautions

1. **Do not install the camera near electric or magnetic fields.** Install the camera away from TV/radio transmitters, magnets, electric motors, transformers and audio speakers since the electromagnetic fields generated from these devices may distort the video image or otherwise interfere with camera operation.
2. **Never disassemble the camera beyond the recommendations in this manual nor introduce materials other than those recommended herein.** Improper disassembly or introduction of corrosive materials may result in equipment failure or other damage.
3. **Try to avoid facing the camera toward the sun.** In some circumstances, direct sunlight may cause permanent damage to the sensor and/or internal circuits, as well as creating unbalanced illumination beyond the capability of the camera to compensate.
4. **Keep the power cable away from water and other liquids and never touch the power cord with wet hands.** Touching a wet power cord with your hands or touching the power cord with wet hands may result in electric shock.
5. **Never install the camera in areas exposed to oil, gas or solvents.** Oil, gas or solvents may result in equipment failure, electric shock or, in extreme cases, fire.
6. **Cleaning.** For cameras with interchangeable lenses, do not touch the surface of the sensor directly with the hands. Use lens tissue or a cotton tipped applicator and ethanol to clean the sensor and the camera lens. Use a damp soft cloth to remove any dirt from the camera body. Please do not use complex solvents, corrosive or abrasive agents for cleaning of any part of the camera.
7. **Do not operate the camera beyond the specified temperature, humidity or power source ratings.** This camera is suitable for indoor operation only. Use the camera at temperatures within $-40^{\circ}\text{C}\sim 50^{\circ}\text{C}$ ($-40^{\circ}\text{F}\sim 122^{\circ}\text{F}$) and humidity less than 80%; this device is not rated as submersible. The input power source is 12VDC or 24VAC. Be sure to connect the proper + / - polarity and voltage, as incorrect polarity or too high a voltage will likely cause the camera to fail, and such damage is not covered by the warranty.
8. **Mounting.** Use care in selecting a solid mounting surface which will support the weight of the camera plus any wind, snow, ice or other loading, and securely attach the camera to the mounting surface using screws and anchors which will properly support the camera. If necessary (e.g. when mounting to drop ceilings) use a safety wire to provide additional support for the camera.

Safety Notice

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



ATTENTION! This is a class A product which may cause radio interference in a domestic environment; in this case, the user may be urged to take adequate measures.



This Product is RoHS compliant.



WEEE

Your EverFocus product is designed and manufactured with high quality materials and components which can be recycled and reused. This symbol means that electrical and electronic equipment, at their end-of-life, should be disposed of separately from your household waste. Please, dispose of this equipment at your local community waste collection/recycling centre. In the European Union there are separate collection systems for used electrical and electronic product.

Please, help us to conserve the environment we live in!

Contents

1. Introduction.....	5
1.1 Packing List	5
1.2 Features	6
2. Cable Description.....	7
3. Installation	8
3.1 Installation and Adjustment.....	8
4. Configuration in the OSD Menu.....	12
5. Specifications.....	16

Model	Image Sensor	Resolution	IR LEDs	Lens type
EA300	1/3" SONY 1.3M pixels	720p	80 Units	1.8 1mm D iris with ICR
EA320	CMOS		8 Units	2.0mm DC iris with ICR

1.1 Packing List

- Quick Installation Guide x 1
- DC Power Pencil Cable x 1
- Screw x 3
- Camera Body x 1
- User Manual x 1
- Test Card x 1
- Plastic Adhesive x 1
- Hexagon Screws x 1
- Desiccant Pack x 1
- Torx Screwdriver x 1

1. Introduction

Get incredible performance in bright light or low light, and the resolution listed in the specification from the actual camera you install. To take full advantage of the amazing resolution available from this advanced imaging technology, the EverFocus eZ.HD Series EZ930/950 uses a vari-focal lens together with 1/2.8" SONY 1.37M pixels CMOS to deliver 720p high resolution. Combined with a useable native low light sensitivity of 0.08lux without using digital slow shutter. This camera truly provides color without compromise: 720p High resolution, Digital Wide Dynamic Range for clear color images in the most challenging of bright or unbalanced scene lighting conditions, plus true day/night IR enhanced images in low light environments with guaranteed ZERO ghosting. The EZ930/950 camera equipped with IP66 weather resistant housing has 3-axis rotation design that delivers wall or ceiling mounting flexibility. Your choice of vari-focal DC iris lens for easily adjustable field of view; dual voltage operation and a full suite of OSD Menu and DSP functions controllable at the camera (3DNR to save DVR HDD space, privacy masking, mirroring, and much more) This is the camera that you have been waiting for to create analog CCTV systems that produce astounding image clarity in a wide range of outdoor applications at the widest range of light levels. The EZ930/950 supports both NTSC and PAL scanning systems, which can be switched via OSD.

Model	Image Sensor	Resolution	IR LEDs	Lens type	IR Distance	Day / Night
EZ930	1/2.8" SONY 1.37M pixels	720p	80 Units	2.8-12mm DC Iris with ICR	35m/115ft.	True Day/Night
EZ950	CMOS		8 Units	5-50mm DC Iris with ICR	50m/165ft.	


1.1 Packing List

- Camera Body x 1
- User Manual x 1
- Test Lead x 1
- DC Power Pigtail Cable x 1
- Screw x 3
- Quick Installation Guide x 1
- Hexagon Wrench x 1
- Screw Driver x 1
- Plastic Anchor x 3
- Template Plate x 1
- Desiccant Bag x 1

1.2 Features

- 720p with high flexibility and performance for astounding image
- 1/2.8" SONY 1.37M pixels CMOS, very low light sensitivity
- Vari-focal 2.8~12mm(EZ930)/ 5~50mm(EZ950) DC iris lens to captures the desired field of view
- 80 IR LEDs for 35m/115ft.range(EZ930);
8 pcs 3G Array IR LEDs for 50m/165ft.range(EZ950)
- D-WDR to improve the visibility under high contrast scene
- Provides 3D Noise Reduction ensures less blurry moving subjects, vivid and high SN ratio images even under low light environments
- Support 720p & 960H analog signal output, which can be easily switched by OSD
- Internal wire system with anti-cut bracket
- Weather Resistant IP66 and built-in heater
- Supports Ceiling Mount and Wall mount

2. Cable Description

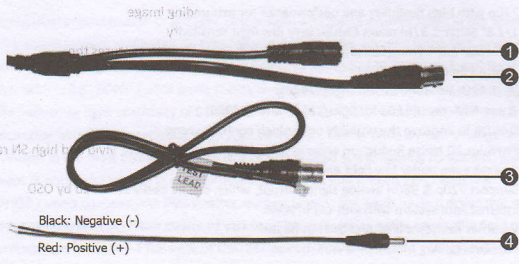


Black: Negative (-)
Red: Positive (+)


No.	Name	Descriptions
1	Power Cable	Connect to a 12VDC or 24VAC power source.
2	Dual Video Output	720p and 960H output, using a 75 Ohm BNC-type coaxial cable.
3	Test Lead	Connect to a monitor for setting image aim and focus.
4	DC Power Pigtail Cable	Optional power pigtail cable. The red wire is positive (+); while the black wire is negative (-).

3. Installation

3.1 Installation and Adjustment




Overview for EZ930




Overview for EZ950


- For Ceiling Mount / Wall Mount users: Stick the **Template Plate** on the position where you want to attach the camera.




- Drill three holes and insert the supplied **Plastic Anchors** into the holes, then attach the camera to the ceiling or wall by using the supplied **Screws**.




- Loosen the screw on the bracket with **Hexagon Wrench**, and adjust camera angles by tilting or rotating the camera. Then fasten the bracket with the **Hexagon Wrench** (Note: The bracket base can be rotated by 360°, the housing body also can be rotated by 360° and tilted by 90°).




- Connect the camera to a AHD DVR or a portable monitor with the 12VDC or 24VAC power source using the supplied **DC Power Pigtail Cable** or a power adapter.

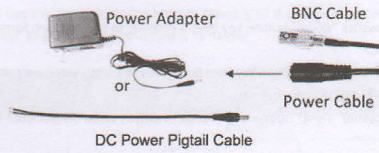

- Loosen the screws on the bottom of housing, then pull out the OSD panel to configure camera settings using the OSD Menu Joystick, connect one end of the **Test** lead to the **Test-out** connector on the camera module and the other end to the portable monitor.



OSD indication as shown in the figure:




- Push the Joystick up / down to select among menu items.
- Push the Joystick left / right to adjust the level of the selected item.
- Press the Joystick to enter the submenu or exit the OSD Setup Menu.

Note: The function button is not only for direction control, also for switching Video format and Video output. Please follow the detailed instruction as below:

- ✧ Push the joystick "down" button key over 5 seconds to switch video format from PAL to NTSC.
- ✧ Push the joystick "left" button key over 5 seconds to switch video output from 720p to 960H (720p is the default).
- ✧ Push the joystick "right" button key over 5s to switch video output from 960H to 720p.

6. Enter the OSD setup menu and adjust the focus & zoom nuts inside the housing by using the supplied Screw Driver.




7. Tear apart the outer packing (figure 1) to take out the Desiccant Bag (figure 2), and put it into the camera housing (figure 3).

Figure 1

Figure 2

Figure 3



Note: It's recommended to close the OSD panel immediately in case of reducing the absorption capacity of the Desiccant Bag inside the camera.

8. Screw back the OSD panel using the supplied Hexagon Wrench.

4. Configuration in the OSD Menu

You can use the Joystick on the bottom housing of the camera to configure camera settings in the OSD menu. The OSD menu structure is as below:

No.	Main	Sub Menu	Sub Menu / Function		
1	Lens	DC*	Mode	Indoor	
				Outdoor*	
			Iris Speed	0 - 15(0*)	
				Manual	
2	Exposure	Shutter	NTSC: 1/30, 1/60, FLK, 1/240, 1/480, 1/1000, 1/2000, 1/5000, 1/10000, 1/50000, X2, X4, X6, X8, X10, X15, X20, X25, X30, Auto*		
			PAL: 1/25, 1/50, FLK, 1/200, 1/400, 1/1000, 1/2000, 1/5000, 1/10000, 1/50000, X2, X4, X6, X8, X10, X15, X20, X25, X30, Auto*		
		AGC	0 - 15(15*)		
		Sens-up	Off*		
			Auto	Sens-up	X2, X4*, X6, X8, X10, X15, X20, X25, X30
		Brightness	1-100(40*)		
		D-WDR	Off*		
			On	Level	0-8(8*)
		Defog	Auto		Off*
			Auto	Pos/Size	Position, Size, ↑, ↓, →, ←
Gradation	0-2(0*)				
Default					
3	Backlight	Off*			

	BLC	Level	Middle*, High, Low			
		Area	Position, Size, ↑, ↓, →, ←			
		Default				
		Select	Area1*, Area2, Area3, Area4			
		Display	Off			
			On*	Position, Size, ↑, ↓, →, ←		
		Black Mask	On*/Off			
		Level	0-100(20*)			
		Model	All Day*			
			Night	AGC Level	0-255(48*)	
Default						
4	White Balance	ATW*				
		AWC→SET				
		Indoor				
		Outdoor				
		Manual	Blue	1-500(50*)		
			Red	0-100(50*)		
		AWB				
5	Day & Night	Ext*	D→N(Delay)	0-60(1*)		
			N→D(Delay)	0-60(1*)		
		Auto	D→N(AGC)	1-255(240*)		
			D→N(Delay)	0-60(1*)		
			N→D(AGC)	1-255(50*)		
			N→D(Delay)	0-60(5*)		
			Color			
		B/W	Burst	Off*/On		
				Off		
			IR Smart	On*	Level	0-15(4*)
					Area	Position, Size, ↑, ↓, →, ←
		IR PWM	Off			
			0-100(100*)			
6	NR	2DNR	Middle*/Low/Off/High			
		3DNR	Middle*/Low/Off/High			
7	Special	Off*				
		Cam Title	0123456789ABCDEFGHIJKLMNQRSTUWXYZ*→ ←↑↓() -_!@#%&'()*+,-./:;<~.,			
		D-effect	Freeze	Off*/On		

	Motion	Mirror	Off*, Mirror, V-flip, Rotate				
		Neg. Image	Off*/On				
		Off*					
		On	Select	Area1*, Area2, Area3, Area4			
			Display	On*	Position, Size, ↑, ↓, →, ←		
				Off			
			Sensitivity	0-100(64*)			
			Color	Green*, Blue, White, Red			
			Trans	1.00*, 0.75, 0.50,			
				0.25			
			Alarm	View Type	Off, Block, Outline, All*		
				OSD View	On*/Off		
				Alarm Out	On*/Off		
		Alarm Sig		High*, Low			
		Time	1-15(3*)				
		Default					
		Off					
		Privacy	On	Select	Area1*, Area2, Area3, Area4		
				Off			
				Display	Color*	Position, Size, ↑, ↓, →, ←	
Mosaic	Position, Size, ↑, ↓, →, ←						
Inv	Position, Size, ↑, ↓, →, ←						
Color	White*, Black, Red, Blue, CYAN, Yellow, Green						
Trans	1.00*, 0.75, 0.50,						
	0.25						
Default							
Language	ENG*/CHN1/CHN2/GER/FRA/ITA/SPA/POL/RUS/POR/NED/TUR						
Defect	Live DPC	Off					
		On*	AGC level	0-255(65*)			
			Level	0-100(100*)			
	White DPC	Off					
		On*	Pos/Size	Position, Size, ↑, ↓, →, ←			
			Start	Close the iris then press			
Level	Off*/On						
0-60(5*)							

8	Adjust		AGC	0-14(14*)			
			Sens-up	x2*, x4, x6, x8, x10, x15, x20, x25, x30			
			Black DPC	Off**			
		RS485	CAM ID	0-255(1*)			
				ID Display	Off*/On		
				Baud Rate	2400,4800,9600,19200,38400		
		Sharpness	Auto*	Level	0-10(6*)		
				Start AGC	0-255(50*)		
				End AGC	0-255(200*)		
			CRT	LCD*	Black Level	0-60(0*)	
					Blue Gain	0-100(50*)	
					Red Gain	0-255(50*)	
					Gamma	User*,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00	
			LSC	Video. Out	Blue Gain	0-100(50*)	
					Red Gain	0-100(50*)	
Off*/On	PAL/NTSC						
9	Exit	Save& END /Reset/Not Saved					

5. Specifications

P/N	EZ930	EZ950
Pickup Device	1/2.8" SONY 1.37M pixels CMOS	
Video Format	NTSC and PAL(can be switched via OSD)	
Effective Pixels	1280 (H)*720 (V)	
Scanning System	Progressive Scan	
Sensitivity	0 lux with IR on	
S/N Ratio	Over 48 dB (AGC OFF)	
Electronic Shutter	AUTO, Manual (X30~1/ 50000), FLK	
Video Output	BNC 1.0Vp-p 75Ω	
Gamma Correction	0.45	
Lens Type	2.8-12mm DC Iris with ICR	5-50mm DC Iris with ICR
BLC	OFF/BLC/HS BLC Selectable	
AGC	0~15 Levels	
White Balance	ATW/AWC-SET/INDOOR/OUTDOOR/MANUAL/AWB	
Sync Mode	Internal	
Day/Night	Ext, Auto, Color, B/W	
IR LED	80 Units	8 Units
IR Distance	Up to 35m/115ft.	Up to 50m/165ft.
OSD Languages	12-Language	
DNR	2DNR/3DNR, Off	
DEFOG	Off/Auto(under B/W mode)	
D-WDR	On/Off	
Sens-up	Off/On(x30~x2)	
Mirror	Off, Mirror, V-flip, Rotate	
Motion Detection	On/Off for 4 selectable zones	
Privacy Mask	On/Off for 4 selectable zones	
Environmental	IP66 Weather Resistant	
Power Source	12VDC/24VAC	
Power Source	12VDC: 12w max./ 24VAC: 13w max.	12VDC: 15w max./ 24VAC: 14.5w max.
Operating Temperature	-40°C~50°C / -40°F~122°F	
Humidity	20%~80%	
Dimensions	236 x 84 x 110mm / 9.3" x 3.3" x 4.3"	
Weight	1100g/2.42lbs	
Certifications	CE/FCC/ RoHS	

Specifications and designs are subject to change for improving the functionality of this product without notice.

EverFocus Electronics Corp.

EverFocus Taiwan:
 12F-1, No.79, Sec. 1, Shin-Tai Wu Road,
 Hsi-Chih, New Taipei City, Taiwan
 TEL: +886 2 2698 2334
 FAX: +886 2 2698 3943
 www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus China - Beijing:
 Room 609, Technology Trade Building,
 Shangdi Information Industry Base,
 Haidian District, Beijing 100085, China
 TEL: +86 10 6297 3336~39
 FAX: +86 10 6297 1423
 www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - California:
 1801 Highland Avenue, Unit A, Duarte, CA 91010,
 USA
 TEL: +1 626 844 8888
 FAX: +1 626 844 8838
 www.everfocus.com
sales@everfocus.com

EverFocus Japan:
 3F Kuramochi, Buildingll 2-2-3 Koto-Bashi,
 Sumida-Ku Tokyo, 130-0022, Japan
 TEL: +81 3 5625 8188
 FAX: +81 3 5625 8189
 www.everfocus.co.jp
info@everfocus.co.jp

EverFocus India:
 UBS, 629/1243, 1st Floor, G Block, Behind
 Teacher's Colony, Bandra Kurla Complex,
 Bandra (E), Mumbai 400 051, India
 TEL: +91 22 6726 4500
 FAX: +91 22 6726 4518
 www.everfocus.in
sales@everfocus.in

EverFocus Europe - Germany:
 Albert-Einstein-Strasse 1, D-46446
 Emmerich, Germany
 TEL: +49 2822 93940
 FAX: +49 2822 939495
 www.everfocus.de
sales@everfocus.de

EverFocus China - Shenzhen:
 4F, No. 2, D4 Building, Wan Yelong
 Industrial Park, Tangtou Road, Shiyan,
 Baoan, Shenzhen, Guangdong 518101, China
 TEL: +86 755 2765 1313
 FAX: +86 755 2765 0337
 www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - New York:
 415 Oser Avenue, Unit 5, Hauppauge, NY 11788, USA
 TEL: +1 631 436 5070
 FAX: +1 631 436 5027
 www.everfocus.com
sales@everfocus.com

EverFocus China - Shanghai:
 Room 403, Ruijin Business Center, No.96, Zhaojiabang
 Road, Luwan district, Shanghai 200020, China
 TEL: +86 21 6471 2229 / 6471 2291
 FAX: +86 21 6471 0566
 www.everfocus.com.cn
marketing@everfocus.com.cn

	<p>Your EverFocus product is designed and manufactured with high quality materials and components which can be recycled and reused. This symbol means that electrical and electronic equipment, at their end-of-life, should be disposed of separately from your household waste.</p> <p>Please, dispose of the equipment at your local community waste collection/recycling centre. In the European Union there are separate collection systems for used electrical and electronic product. Please, help us to conserve the environment we live in!</p>	<p>Ihr EverFocus Produkt wurde entwickelt und hergestellt mit qualitativ hochwertigen Materialien und Komponenten, die recycelt und wiederverwendet werden können. Dieses Symbol bedeutet, dass elektrische und elektronische Geräte am Ende ihrer Nutzungsdauer vom Hausmüll getrennt entsorgt werden sollen.</p> <p>Bitte entsorgen Sie dieses Gerät bei Ihrer örtlichen kommunalen Sammelstelle oder im Recycling Center. Helfen Sie uns bitte, die Umwelt zu erhalten, in der wir leben!</p>
---	--	--

